

TRENDY TILES

LONDON

LONDON³





floor shown LONDON³ 60x60 LONDON GREY



FINE PORCELAIN TILES

RECTIFIED

LAPPATO-MATT FINISH

TRENDY TILES

LONDON

LONDON³
ARCTIC WHITE



Size 60x60 cm




Size 30x60 cm




Size 10x30 cm

Mosaics on net

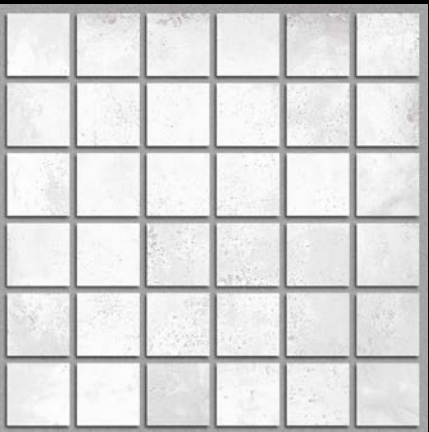

Square 5x5 cm

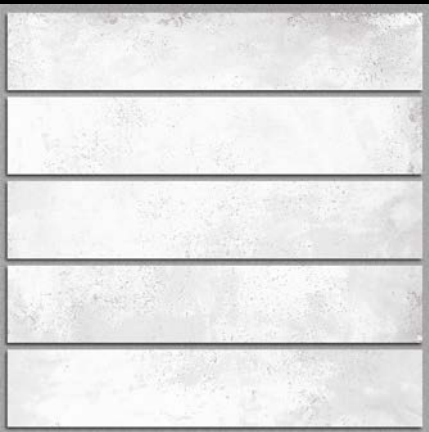

Linear bricks 6x30 cm



FINE PORCELAIN TILES

RECTIFIED

LAPPATO-MATT FINISH

TRENDY TILES

LONDON

LONDON³
SAHARA DUST



Size 60x60 cm



Size 30x60 cm



Size 10x30 cm

Mosaics on net



Square 5x5 cm



Linear bricks 6x30 cm



FINE PORCELAIN TILES

RECTIFIED

LAPPATO-MATT FINISH

TRENDY TILES

LONDON

LONDON³
LONDON GREY



Size 60x60 cm



Size 30x60 cm



Size 10x30 cm

Mosaics on net



Square 5x5 cm



Linear bricks 6x30 cm



FINE PORCELAIN TILES

RECTIFIED

LAPPATO-MATT FINISH

TRENDY TILES

LONDON

LONDON³

BERING GREY



Size 60x60 cm



Size 30x60 cm




Size 10x30 cm

Mosaics on net



Square 5x5 cm

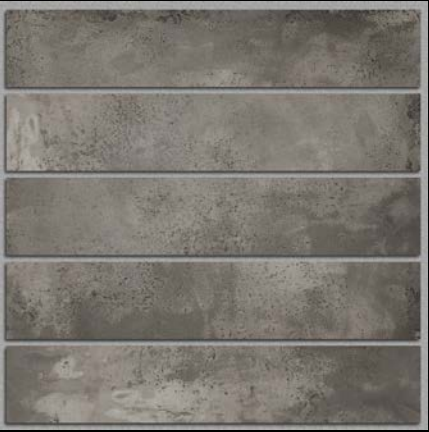

Linear bricks 6x30 cm



Packaging Details

Nominal values

		CM	KG	BOXES	PCS/BOX	MQ/PALLET	KG/BOX
	1 pallet	10x30	900,00	48	30	43,20	18,00
	1 pallet	30x60	1.152,00	48	6	50,40	24,00
	1 pallet	60x60	1.020,00	40	3	43,20	25,50
	1 pallet	30x30 mosaics		48	10		20,00

Sizes

Nominal values

ESTIMATES effective sizes

10x30 cm	9,5x29,5 cm
30x60 cm	29,5x59,5 cm
60x60 cm	59,5x59,5 cm
mosaics Square 5x5 cm	4,7x4,7 cm
mosaics Linear bricks 3x10 cm	2,7x9,7 cm
mosaics Linear bricks 6x30 cm	5,95x29,5 cm
mosaics Random	totally randomly produced

Specifications

Nominal values

TECHNICAL DATA	STANDARD	REQUIREMENT	COLLECTION VALUE
sides	EN ISO 10545-2	± 0,6% max	conforms
thickness	EN ISO 10545-2	± 5,0% max	conforms
straightness of sides	EN ISO 10545-2	± 0,5% max	conforms
rectangularity	EN ISO 10545-2	± 0,6% max	conforms
surface flatness	EN ISO 10545-2	± 0,5% max	conforms
water absorption	EN ISO 10545-3	≤ 0,5%	conforms
bending resistance	EN ISO 10545-5	≥ 35 N/mm²	conforms
abrasion resistance	EN ISO 10545-6	≤ 175 mm³	conforms
coefficient of linear thermal-exp ansion	EN ISO 10545-8	available on request	conforms
thermal shock resistance	EN ISO 10545-9	no visible defects	conforms
frost resistance	EN ISO 10545-12	no visible defects or cracks no	conforms
chemical resistance	EN ISO 10545-13	visible changes to surface no	conforms
stains resistance	EN ISO 10545-14	permanent staining	conforms
slip resistance	ASTM	wet +0,62 / dry +0,68 average	conforms
slip resistance	DCOF BOT 3000	wet +0,43	conforms

Although we try to make the colours showed in this catalogue as close to real pieces as possible, they are reproduced as an indication only and they may differ from the real pieces since is impossible to get the same tone colour shade on printed paper.



CITY OF LONDON

TRENDY TILES LTD

london@trendytiles.com - trendytiles.com